

# Software update

The DEVA System Manager allows you to remotely update the firmware and the software on board of multiple DEVA at a time.

The software updating procedure encompass two main steps:

- ▶ DEVA software update.
- ▶ DEVA System Manager update.

## I DEVA software update procedure

1. Access the DEVA System Manager and click on the **Settings** tab.
2. On the left menu click on **System settings**.
3. Select the DEVA you want to update and click on the **Software upload** button (ref. [FIGURE 2](#)).
4. A new dialog window appear: click on the “+” button and select a file with the **.deva** extension.
5. Confirm the selection by clicking on the **Upload** button. Wait until the end of the update process (it can take some minutes).

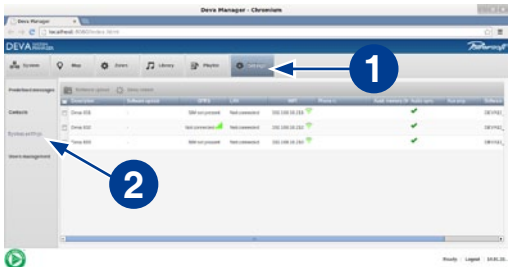


FIGURE 1: Click on the Settings tab.

6. At the end of the updating procedure, the Setting panel of the DEVA system Manager will show the status as “Completed” on the Software update column and the software version on the “Software” column (ref. [FIGURE 4](#)).

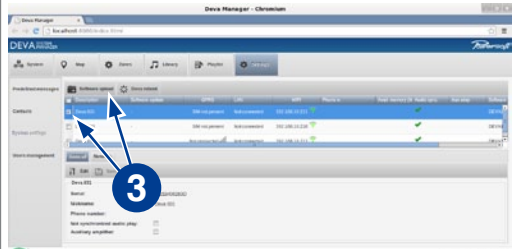


FIGURE 2: Select one or more DEVA and click on the Software update button.

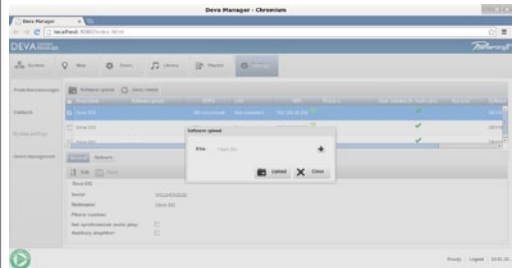


FIGURE 3: Enter a .deva file.



FIGURE 4: Software updated.

## 2 Update the DEVA System Manager

The DEVA System Manager update package is distributed as a **.deb** file. The update procedure is performed on the PDD: you need to know the PDD system administrator password in order to complete the process.

1. Double click on the **.deb** package (e.g. `devabiz_13.12.20_i386.deb`)
2. Click on "update" and enter the PDD system administrator password (*powersoft* if you didn't specify a different one).
3. Wait for the process to be finished
4. Reboot the PDD.